

Product Code: CT205M

Description: 250V~ 20A 4 Pole Male Push Fit Connector



General Information

Dimensions (mm)	79 (W) x 47 (D) x 24 (H)	
Minimum Aperture Diameter (mm)	50	
Materials	Cover: Polycarbonate	Base & Terminal Housing: Nylon (PA66)
	Terminals: Silver Plated Brass	Contact Spring: Stainless Steel
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	20	
Rated Impulse Voltage (kV)	4	
Recommended Inner Core Strip Length (mm)	L & N: 30; E: 38	
Recommended Conductor Strip Length (mm)	12	
Termination Type	Push Fit	
Terminal Capacity - Solid (mm ²)	2.5 (Max.)	
Terminal Capacity - Flex (mm ²)	2.5 (Max.)	
Termination Layout (Male)	A - N - E - L	
Cable Entry (Male Left Entry)	2 x 2.5mm ² Max.	
Cable Entry (Male Right Entry)	3 x 2.5mm ² Max.	
Cable Restraint Supplied	Yes	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Standards BS EN 61535

Additional Information


For cleaning / polishing of products, use only a soft, dry, clean cloth.
 Ensure that the mains supply is isolated before commencing installation.
 Always refer to the circuit diagram supplied with the relevant product.
 Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal.
 Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.

Product Code: CT205M

Description: 250V~ 20A 4 Pole Male Push Fit Connector


Wiring Example

MALE - CT205M

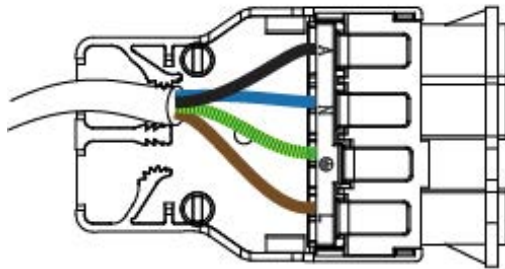


LOAD

FEMALE - CT205F

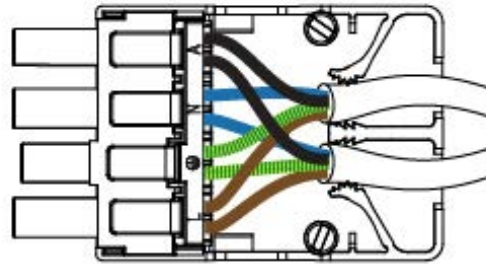


SUPPLY

MALE - CT205M

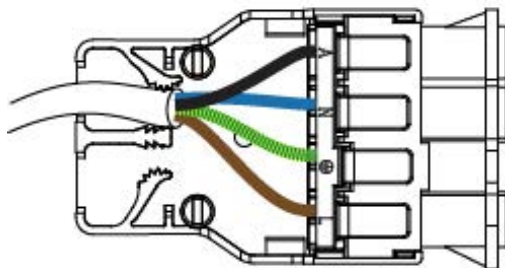

LOAD

FEMALE - CT215F

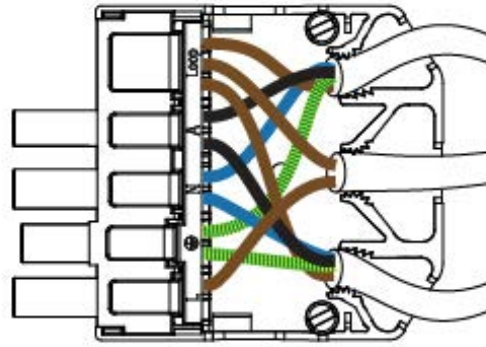

SUPPLY