




List No. NHXLC16

NH / NM / NMX

16A SP Type C 6kA MCB

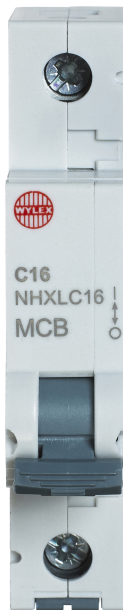

- Single pole MCB, 16A C curve
- Energy limiting Class 3
- Quick release DIN clip
- No miss busbar connection
- Fits NM & NMX consumer units

Product Specification Data

Revision Date: 15/10/2021

| | |
|--|------------------------|
| Release characteristic | C |
| Number of poles (total) | 1 |
| Number of protected poles | 1 |
| Rated current | 16 A |
| Rated voltage | 230 V |
| Rated insulation voltage U_i | 400 V |
| Rated impulse withstand voltage U_{imp} | 4 kV |
| Rated short-circuit breaking capacity I_{cn} EN 60898 at 230 V | 6 kA |
| Rated short-circuit breaking capacity I_{cn} EN 60898 at 400 V | 6 kA |
| Voltage type | AC |
| Frequency | 50 Hz |
| Current limiting class | 3 |
| Suitable for flush-mounted installation | No |
| Concurrently switching N-neutral | No |
| Over voltage category | 3 |
| Additional equipment possible | No |
| Width in number of modular spacings | 1 |
| Built-in depth | 73 mm |
| Degree of protection (IP) | IP20 |
| Ambient temperature during operating | -5 - +40 °C |
| Connectable conductor cross section multi-wired | .75-25 mm ² |
| Product Standard/s | BS EN 60898-1 |
| CE Conformity | Yes |
| WEEE Symbol | Yes |
| UKCA Conformity | Yes |

Although every effort has been made to ensure accuracy in the compilation of the technical detail within this datasheet, specifications and performance data are constantly changing. Latest details can be obtained from the Electrium website.