


Product Code: CT803

Description: 6A 4 Pole 0.75mm² Male To Female Extension Cable PVC - 3M

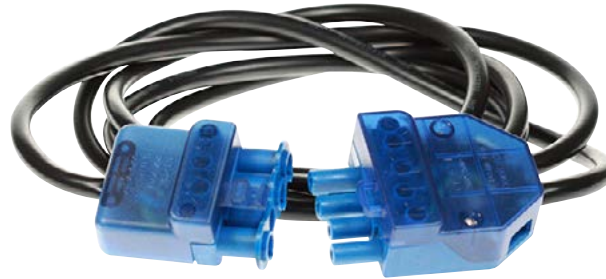

General Information

CT202F Dimensions (mm)	69 (W) x 50 (D) x 23 (H)	
CT201M Dimensions (mm)	54 (W) x 30 (D) x 22 (H)	
Insert Colour	Blue	
Materials	Cover: Polycarbonate	Base & Terminal Housing: Nylon (PA66)
	Terminals: Silver Plated Brass	Terminal Screws: Steel and Yellow Passivated
Operating Voltage (AC)	250	Frequency (Hz) 50
Resistive Load Rating (A)	6	
Cable - Assembly Rating (A)	6	
Pre-wired Cable Specification	4G 0.75mm ² (PVC) H05VV-F	
Termination Type	Screw	
Cable Restraint Supplied	Yes	
Ingress Protection	IP20	
Operational Temperature (°C)	-5 to +40	
Warranty (Years)	10	

Standards BS EN 61535, BS 5733, BS EN 50525-3-11

Additional Information For cleaning / polishing of products, use only a soft, dry, clean cloth. Ensure that the mains supply is isolated before commencing installation. Always refer to the circuit diagram supplied with the relevant product. Bare earth cables must always be covered with appropriate sleeving and wired to the earth terminal. Any dangerous compatibility between different manufactures installation coupler systems is not automatically prevented by compliance with IEC 61535.